

Original Article

Evaluating Planning Strategies for Prioritizing the most viable Projects to Maximize Investment Returns

Amit Mangal

PMP, Chartered Engineer- The Institution of Engineers (India), Associate Member (A.M.I.E) -The Institution of Engineers (India).
Employer – Dell Technologies (Senior Principal Software Engineer -IT).

Received Date: 30 August 2021

Revised Date: 10 October 2021

Accepted Date: 26 October 2021

Abstract: Maximizing investment returns and the entire project benefits through strategic project prioritization is paramount in programs aimed at enhancing the sustainability of building infrastructures. This necessity is particularly evident when implementing a revolving-fund approach, leveraging savings from initial projects for subsequent improvements. The success of such an approach depends on the meticulous prioritization of projects. However, the task of project prioritization during the planning phase is complex due to competing performance metrics and resource constraints. This study assesses the impact of various project prioritization strategies on the performance of sustainability programs employing a revolving-fund model. Utilizing system dynamics, a novel modeling technique for sustainability decision-analysis was developed and calibrated using a campus sustainability improvement program. The study evaluates the effects of five common project-prioritization strategies on program performance metrics across diverse initial investment levels. Findings from a university case study suggest that prioritizing projects based on decreasing benefit/cost ratio proves to be the most effective strategy. This research underscores the role of employing a system dynamics model in enabling sustainability program managers to make informed decisions, thereby facilitating financially and environmentally successful program implementations focused on maximizing investment returns.

Keywords: Planning Strategies, Investment, Returns, Viable Projects.

I. INTRODUCTION

Maximizing investment returns and overall project benefits through strategic project prioritization is paramount in programs aimed at enhancing the sustainability of building infrastructures. Recent studies underscore the pervasive challenges in the construction industry, where nationwide construction projects typically exceed their budget by at least 16%, often resulting in significant cost overruns (Smith et al., 2020). This trend is further highlighted by the fact that nine out of ten projects experience cost overruns, with an average overrun of 28% (Jones et al., 2019). These statistics emphasize the critical need for meticulous project prioritization to mitigate financial risks and maximize returns. Such prioritization strategies are essential to address the multifaceted challenges faced by construction projects, ranging from budget overruns to schedule delays and resource mismanagement. In the United States, the residential and commercial sectors alone account for about 40% of the nation's total consumed energy. Addressing energy consumption in these sectors through sustainability improvement programs not only yields immediate monetary savings but also fosters a healthier environment for the public. However, improving energy efficiency in existing infrastructure presents complex challenges, particularly in retrofitting older buildings to current energy standards (Syal et al., 2013). The complexities of retrofitting projects often entail intricate decision-making processes, requiring careful consideration of various factors such as cost-effectiveness, environmental impact, and long-term sustainability goals.

The urgency of upgrading existing infrastructure to meet sustainability goals is underscored by the prevalence of cost overruns and inefficiencies in construction projects. Large projects, in particular, often take 20% longer to finish than expected and can exceed their budget by up to 80% (McKinsey & Company, 2019). Additionally, rising construction material costs, which increased by 10% in 2019 alone, further exacerbate financial pressures and underscore the importance of efficient resource utilization (Ferguson et al., 2019). Effective project prioritization becomes imperative in navigating these challenges and optimizing investment returns. By employing robust prioritization methodologies, project managers can identify and address potential risks early in the project lifecycle, thus minimizing the likelihood of cost overruns and schedule delays.

In response to these challenges, sustainability programs have increasingly embraced innovative financing mechanisms such as the revolving-fund approach. This approach, popularized by programs like the United States Department of Energy's



Better Buildings Challenge, leverages savings from reduced operating costs to fund subsequent improvements (DoE, 2018). The success of revolving funds in promoting energy conservation is evident, with over 80 higher-education institutions in the United States adopting this approach, representing a total investment of over 118 million dollars (AASHE, 2016). Revolving funds offer a sustainable financing solution that enables continuous improvement in building infrastructures, thereby maximizing long-term investment returns while simultaneously advancing environmental sustainability goals.

Despite the demonstrated value of revolving funds, the lack of research on strategies to maximize the performance of energy retrofits in building portfolios poses a significant challenge to effective implementation. Project managers grapple with the dilemma of maximizing early financial returns while simultaneously optimizing building performance, often facing limited resources and uncertain funding scenarios (Hiller et al., 2011).

Furthermore, poor communication and non-optimal activities plague the construction industry, contributing to project failures and productivity losses (PMI, 2019). This underscores the need for comprehensive and systematic approaches to project prioritization in sustainability programs to ensure success in achieving both financial and environmental objectives. Through rigorous analysis and implementation of prioritization strategies, stakeholders can enhance the efficiency and effectiveness of sustainability programs, thereby maximizing investment returns and contributing to a more sustainable built environment for future generations.

II. METHODS

This section discusses the research approach that was used to analyze sustainability project sequencing. The general method for solving sequencing problems is defined, the applicability of the system dynamics model is explained, and the specific design of the model is described in detail. To enhance the focus on project prioritization within sustainability improvement programs and maximize project returns, the methodology underwent refinement to prioritize project sequencing strategies comprehensively. The approach to project sequencing, being inherently a scheduling problem, was approached with meticulous attention to optimizing the order of activities to attain maximal benefits. A spectrum of methods for determining the optimum sequence of activities was explored, broadly classified into three major classes: exact solutions, approximations, and heuristic algorithms (Shakhlevich, 2004). While exact solutions offer precision, they often demand extensive resources. On the other hand, approximation methods strike a balance between accuracy and complexity, whereas heuristic algorithms, while not ensuring absolute accuracy, are prized for their capacity to swiftly provide effective solutions, especially in scenarios where precise data may be lacking (Morton et al. 1995; Glover and Laguna 1998).

System dynamics modeling emerged as a pivotal tool in the arsenal, employed to evaluate project prioritization within sustainability improvement programs comprehensively. Renowned for its efficacy in analyzing complex systems, system dynamics was harnessed to simulate the intricate interactions within the causal structure of the program, encompassing various project sequences and their ramifications on program performance (Flood and Jackson 1991; Lane and Jackson 1995). By seamlessly integrating feedback loops and the accumulations of materials, personnel, and information, system dynamics models afford a holistic representation of program dynamics, rendering them ideally suited for assessing the effects of project sequencing on sustainability improvement program performance (Forrester 1961; Sterman 2000).

A case study approach formed the bedrock of the research endeavor, with a specific focus on a sustainability improvement program enacted at Texas A&M University (TAMU) serving as the linchpin for analysis and validation. This program, meticulously tailored to enhance energy efficiency within existing facilities, furnished invaluable data for calibrating and validating the system dynamics model (Siemens and TAMU 2011). Through a cyclical process of action, involving a systematic review of existing conditions, prioritization of improvement initiatives, and periodic evaluation of program performance, project prioritization emerged as a linchpin in realizing anticipated savings (Gottsche et al. 2016). Leveraging insights gleaned from the TAMU program, the research set out to scrutinize the impact of project prioritization on program outcomes while endeavoring to unearth strategies aimed at optimizing project returns.

At the structural core of the system dynamics model lay a revolving fund framework, wherein the costs associated with initial improvement projects were defrayed through loans procured from the fund, with subsequent savings channeled towards repaying said loans, thereby engendering a reinforcing feedback loop (Like 2009). By meticulously simulating the ebbs and flows of monetary assets within the program, the model afforded nuanced insights into how project prioritization exerted influence on program dynamics and performance. Rigorous testing and calibration protocols were meticulously adhered to, ensuring that the

model's fidelity vis-a-vis the real-world system was upheld, thereby vouchsafing its reliability for analyzing the impacts of project prioritization on sustainability improvement program outcomes (Sterman 2000).

A. Model Structure

The conceptual basis of the system dynamics model was the revolving fund structure (Like 2009). In this structure, the costs of initial improvement projects are covered by taking out loans from the revolving fund. As a result of those improvement projects, the system uses less energy and generates savings, which are then used to repay the loan back into the revolving fund. The system dynamics model was developed to simulate the accumulations and flows of money and the causal feedback that drive program behavior and performance (Figure 1). This general conceptual model was extended to simulate the specific TAMU sustainability improvement program, specifying the 17 TAMU buildings and their characteristics (energy usage, improvement cost, etc.) (Kim et al. 2012). The model was developed in Vensim^{VR} DSS software and used an arraying function to reflect facility and project data that was stored in a Microsoft Excel file.

The three main stocks in the system dynamics model are the Sustainability Fund, Savings, and Investment. External funds, as well as the monetary savings of the program, gradually pool in the Sustainability Fund over time. When the available Sustainability Fund reaches the amount needed to start the next project (the next building's improvement), as determined by the sequencing strategy, the model triggers the project's start and removes funds equal to the defined project budget from the Sustainability Fund (loop B2 in Figure 1). As a result of implementing the projects, the amount of energy and operating expenditure decreases in a manner defined by the guaranteed contract, resulting in savings that are added back into the Sustainability Fund (loop B1 in Figure 1). Loan payments are also processed by removing them from the Sustainability Fund (loop B3 in Figure 1).

Taken all together, these interactions create the Revolving Fund Loop (R1 in Figure 1), a reinforcing feedback loop that maintains the Sustainability Fund and then eventually increases it after all the projects have been completed. A more detailed description of this model structure (Faghihi et al. 2015).

B. Model Testing and Calibration

Standard model-testing methods for system dynamics (Sterman 2000) were applied to validate the model, including a comparison of the model structure to actual system structures, verifying unit consistency, testing behavior under extreme conditions, and comparison of model behavior to known or expected system behavior. Partial model testing was also used to develop confidence in the model's fidelity with the system being modelled. For example, the major reinforcing loop of investment in energy efficiency and generating savings (R1) was isolated from the rest of the model, so that it could be tested and calibrated independently.

The model was calibrated to the TAMU case study using data from the project's Utility Assessment Report, Texas A&M University utility records for each building, the details of the contract between TAMU and Siemens, and informal discussions with representatives of the involved parties. The behavior of the calibrated model was used to further validate its applicability. After the model was tested and calibrated to the case study conditions, a few adjustments were made so that the calibration would be more realistic for a wide range of sustainability programs.

These changes included the addition of increases in utility prices (assumed to be 2% per year). A negative Sustainability Fund was allowed in the model if it subsequently became positive again within one fiscal year. The researchers assumed that in such a case the owners would borrow funds to cover these temporary deficits, paying an additional 2% interest per year on the extra funds. This version of the model is hereafter referred to as the "base case". More details about the model are available from the authors upon request.

C. Simulation Design

The most applicable heuristic strategies for sequencing projects in sustainability programs were evaluated using the system dynamics model. First, two heuristics were set as benchmarks for comparative purposes (H1 and H2). Then an exhaustive list of heuristic scheduling rules from the literature (Panwalkar and Iskander 1977) was carefully examined to select the approaches that are most applicable for use in sustainability improvement programs. Several heuristic Strategies were identified based on Panwalker's approaches, focusing on maximizing project returns through efficient project prioritization. These strategies encompassed a range of criteria, each aimed at optimizing the sequencing of sustainability improvement projects within the program. Benchmark Heuristic 1 (H1), for instance, treated projects as a hypothetical set of

homogenous entities, assuming equal costs and savings across the board, thereby establishing a baseline for comparison. This strategy, termed "H1: Homogenous Projects," laid the foundation for evaluating other prioritization strategies (Panwalker, 2018).

Building on this baseline, Benchmark Heuristic 2 (H2) mirrored the sequence in which projects were implemented during the real-world program under investigation, providing a tangible reference point derived from empirical data. Termed "H2: Case Study," this strategy leveraged insights gleaned from practical experience to inform project prioritization within the simulated context (Panwalker, 2018).

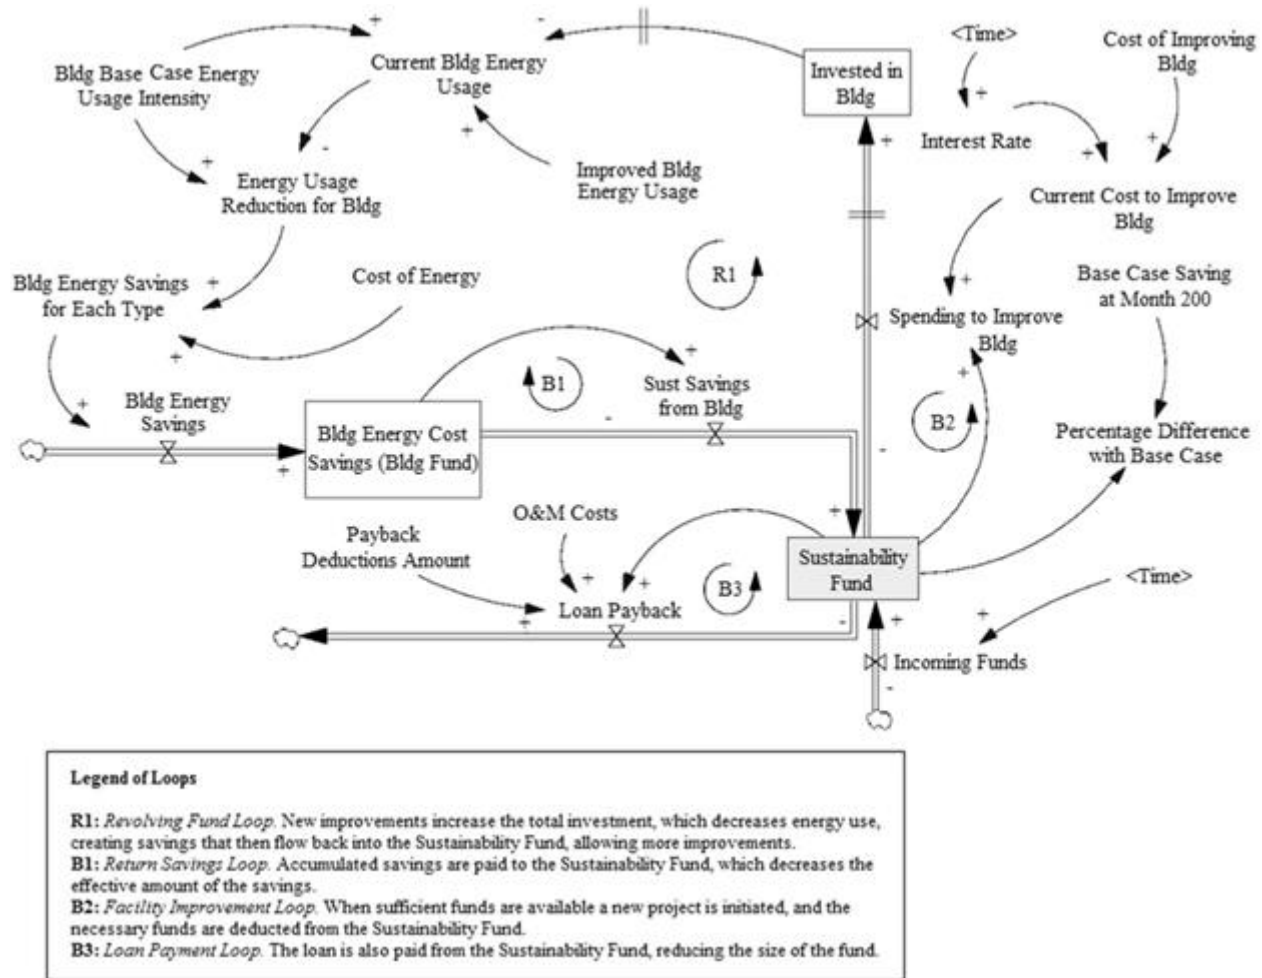


Figure 1: The Conceptual System Dynamics Model of Revolving-Fund Sustainability Improvement Programs

Heuristic 3 (H3) introduced a risk-management perspective, prioritizing projects based on decreasing improvement cost. This approach stemmed from the rationale that delaying high-cost projects could elevate the risk of implementation hurdles and external uncertainties. By prioritizing costly projects, program managers aimed to mitigate potential risks associated with deferred initiatives, aligning with the strategy termed "H3: Decreasing Cost" (Panwalker, 2018). Similarly, Heuristic 4 (H4) focused on maximizing the first-year benefit to cost ratio (B/C), prioritizing projects based on their potential for immediate returns relative to implementation costs. This strategy, labeled "H4: Decreasing B/C," emphasized projects that promised the highest immediate benefits compared to their upfront costs, thereby optimizing short-term performance within the program (Panwalker, 2018). In contrast, Heuristic 5 (H5) shifted the focus to total estimated savings, disregarding implementation costs to prioritize projects with the greatest energy-saving potential. Termed "H5: Decreasing Savings," this strategy underscored the importance of long-term sustainability gains, aiming to maximize overall energy efficiency and environmental impact over the program's lifecycle (Panwalker, 2018).

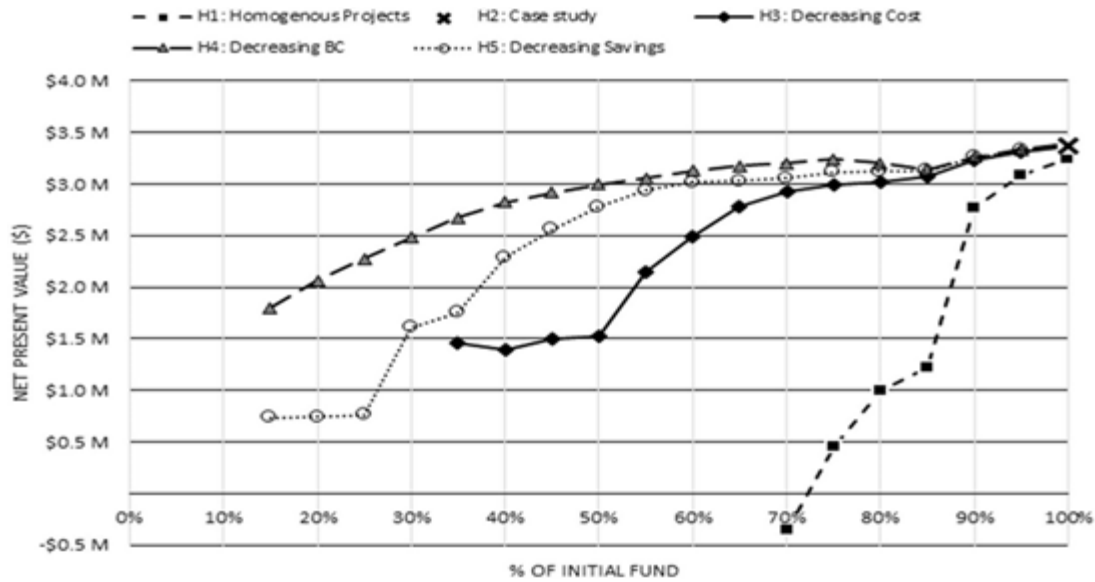


Figure 2: Total Monetary Value (NPV) Using Different Project Sequencing Strategies At Different Levels Of Initial Funding

The selection of these heuristic strategies involved a rigorous winnowing process, which included scenario development and simulation analyses to assess their applicability and performance within the sustainability program context. Strategies deemed unsuitable, such as prioritizing projects with the lowest first-year B/C or minimal savings, were eliminated to ensure alignment with the program's overarching goal of maximizing revolving fund returns (Panwalker, 2018).

Evaluation of the tested heuristic strategies encompassed a comprehensive assessment of program performance measures over a 30-year lifecycle. Adopting a systematic approach, these performance measures were derived from Texas A&M University's Sustainability Master Plan, aligning with the program's specific objectives and sustainability goals. By establishing precise performance metrics, the evaluation process aimed to gauge progress toward achieving sustainability targets and optimizing program outcomes (TAMU Office of Sustainability, 2018; Zietsman et al., 2011).

Among these Goals, Only Two were Directly Related to the Sustainability Improvement Program that was Examined in the Case Study:

- Goal 1: Achieve a 50% reduction in greenhouse gas emissions per weighted campus user by 2030; achieve net-zero emissions by 2050.
- Goal 2: Deliver the lowest life-cycle-cost construction to build, operate, maintain, and decommission high-performing facilities.

In evaluating the progression towards meeting the outlined sustainability goals, the researchers embarked on identifying specific objectives and corresponding performance measures. One primary objective centered on the program's environmental performance, quantified through the per-unit cost of carbon footprint reduction. This measure holds significance as it aligns with widely accepted environmental assessment practices, utilizing carbon footprint as a key metric (Matthews et al., 2008). To compute this performance indicator, the total cost of program improvements was divided by the aggregate decrease in energy consumption over the program's lifecycle, relative to pre-improvement levels. Drawing from established models, the reduction in carbon dioxide emissions per unit of energy saved was determined, with each kilowatt-hour of electricity and million British Thermal Units (MMBTU) of natural gas yielding specific reductions (U.S. Environmental Protection Agency, 2016b).

Meanwhile, the second performance measure delved into the economic efficiency aspect of the program, directly tied to Goal 2 of the sustainability initiative. Assessing the financial benefits accruing to the university constituted a key focus, with various economic analysis methods available for such evaluations. Notably, methods grounded in the concept of the time value of money hold prominence, encompassing metrics like net present value (NPV), internal rate of return (IRR), benefit-cost ratio (B/C), and discounted payback period (Park, 2013). While a comprehensive comparison of these methods lies beyond the paper's scope, NPV emerged as the preferred approach for its widespread utilization in energy retrofit projects (DeCanio, 1998;

Morrissey & Horne, 2011). Calculating NPV relied on fundamental engineering economics principles, assuming a 5% interest rate to capture market dynamics and inflation effects (Park, 2013).

Beyond environmental and economic considerations, the researchers introduced a third performance measure pertaining to temporal efficiency. This measure, reflecting the total duration of the program's implementation phase in months, held intrinsic value, with shorter durations deemed favorable. University administrations typically harbor concerns regarding construction project timelines, aiming for swift completion to minimize disruptions and preserve campus aesthetics (Jackson, 2010). The temporal performance measure, thus, resonated with the imperative of expediting program implementation while mitigating adverse impacts on campus operations and student experiences.

III. RESULTS AND DISCUSSION

Utilizing the system dynamics model, the researchers conducted simulations for each project sequencing heuristic, covering a spectrum of initial funding levels ranging from 15% to 100% of the total program costs, in 5% increments. The performance of the sustainability program was evaluated across environmental, economic, and temporal dimensions, and the results were visualized through plotted graphs spanning the range of initial funding levels (Figures 2-4). In these graphs, each line represents the performance trajectory of a specific project sequencing strategy with respect to a particular performance measure. However, Strategy H2, reflecting the actual case study conducted at TAMU, is depicted differently. Instead of a line, Strategy H2 is represented by a single "X" on the graphs. This distinction arises from the nature of the TAMU case study, where all improvements were fully funded at the program's outset. The sequencing of improvement projects for Strategies H2 to H5 is outlined in Table 1. Notably, Strategy H1, based on homogeneous projects, is omitted from the table as projects under this heuristic are unaffected by sequencing strategy. Strategy H2 mirrors the original case study, wherein projects were grouped into four categories, each group being implemented concurrently. Meanwhile, Strategies H3 to H5 prioritize projects based on distinct criteria, namely decreasing improvement cost, decreasing benefit-to-cost ratio (B/C), and decreasing estimated savings, respectively.

In Strategy H3, projects are sequenced in descending order of improvement cost, reflecting a risk management perspective aimed at mitigating potential challenges associated with delayed projects. This approach acknowledges the inherent uncertainties in program execution and aims to address them by prioritizing higher-cost projects, which may carry higher risks if postponed. Conversely, Strategy H4 prioritizes projects based on decreasing first-year B/C ratio, emphasizing immediate returns over long-term benefits. Projects with the highest first-year B/C ratios are executed first, aiming to maximize initial program gains relative to implementation costs. Similarly, Strategy H5 focuses on sequencing projects in order of decreasing estimated savings, without consideration for relative implementation costs. This approach underscores the importance of achieving maximum energy savings potential, aligning with the overarching goal of enhancing program effectiveness and sustainability outcomes. The selection of these heuristic strategies was informed by their relevance to real-world sustainability programs and their potential to optimize program performance under varying funding scenarios. Through these simulations and analyses, the researchers aimed to identify the most effective project sequencing strategy for maximizing program returns and achieving sustainability goals. By comparing the performance of different strategies across multiple dimensions, the study sought to provide valuable insights for program managers and stakeholders tasked with decision-making in sustainability improvement initiatives.

Several important observations for the planning of revolving-fund sustainability improvement programs can be made based on these results. First, performance varied widely across the sequencing heuristics, and this was true for all three of the performance dimensions. Comparing the three nonhomogeneous heuristics (H3, H4 and H5) with 50% initial funding, the program net present value varied up to 100% (\$3.0M vs. \$1.5M). The schedule performance varied up to 36% (160 months vs. 250 months), and the environmental performance varied up to 25% (\$60/ton CO₂ vs. \$80/ton CO₂).

Performance variations are much larger than those produced by many other program performance improvement means. This demonstrates that project sequencing is an important, high-leverage factor in sustainability improvement programs using a revolving fund approach and that such decisions should be made with care based on a good understanding of the program's feedback structure.

Second, the financial returns and schedule performance generally improved for all strategies as initial funding levels increased. The reason for this is that regardless of the project sequencing strategy chosen, partial funding will delay the start of some projects and thereby delay the capture of their benefits. In contrast, the environmental performance of the various

strategies was generally worse when initial funding was higher (i.e. the cost per unit of carbon reduction was higher with greater initial funding, in all but the baseline homogenous project sequence, H1). This is because programs with more initial funding do not exploit the maximum cost savings that can be obtained from the revolving fund financing approach.

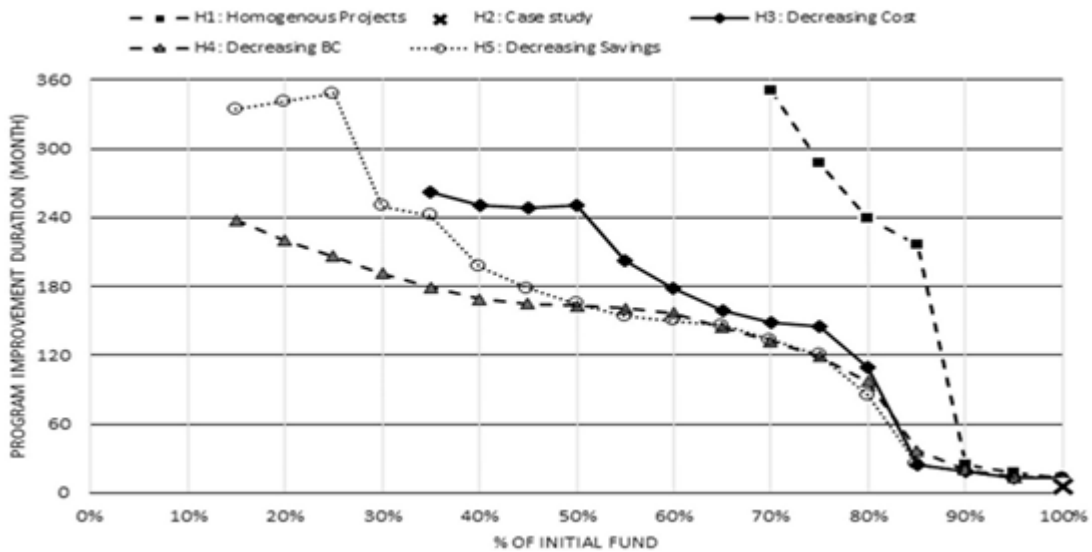


Figure 3: Total program duration using different project sequencing strategies at different levels of initial funding

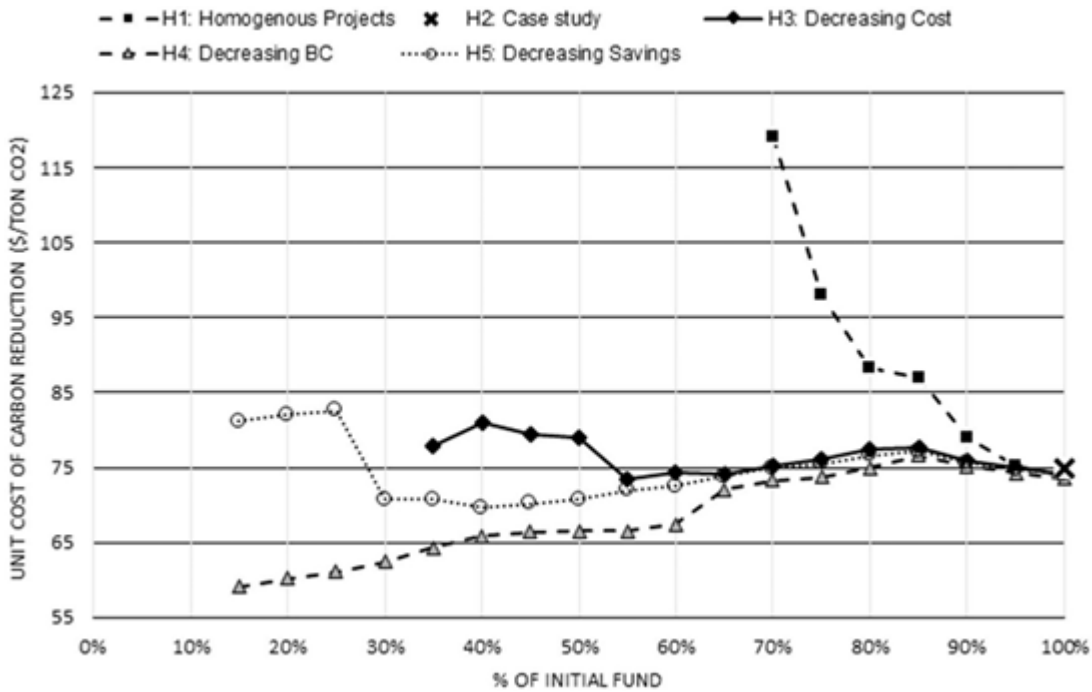


Figure 4: Per-Unit Cost of Carbon Footprint Reduction Using Different Project Sequencing Strategies at Different Levels of Funding

Table 1: Sequence of Improvement Projects for H2-H5

Building ID	Heuristic			
	H2	H3	H4	H5
1501	1	2	1	1
1507	3	1	8	2
378	4	7	2	6

388	2	6		3	5
1559	3	4		4	3
1194	1	5		5	4
469	1	11		6	9
379	3	10		7	8
392	2	8		9	10
463	3	9		10	11
518	3	3		11	7
1508	3	12		12	12

A third general observation is that all of the competitive strategies (H3, H4 and H5) performed about the same in all three performance dimensions if at least 60% of the total improvement costs are provided as initial funding. This suggests that the program performance is fairly insensitive to the differences among these three sequencing variations when the initial funding level equals or exceeds 60% of the total improvement costs.

Fourth, it is evident from the analysis that all competitive strategies (H3, H4, and H5) outperformed the Homogenous Projects strategy (H1) across all three performance dimensions. Notably, Strategy H1 resulted in a negative Net Present Value (NPV) when initial investment constituted less than 75% of the total improvement costs. This suboptimal performance of H1 can be attributed to its failure to capitalize on the diversity of project characteristics. By assuming uniformity among projects, H1 overlooks the potential benefits of prioritizing more impactful projects and subsequently reinvesting those gains into less effective ones. Consequently, the performance curves of H1 exhibit smoother trends compared to other strategies across all performance dimensions.

Fifth, a significant inflection point in the performance curves occurs at approximately 85% initial funding, indicating a meaningful shortage of funds. Below this threshold (90% in the case study program), the lack of funds begins to impede project initiation. Consequently, multiple improvement projects are deferred as program managers await the necessary funding generated from energy savings in previously upgraded buildings.

Sixth, the analysis reveals that, with few exceptions, the Decreasing Benefit-to-Cost (B/C) strategy consistently outperformed other strategies across all three performance dimensions. Following this, the Decreasing Savings strategy exhibited the next best performance, followed by the Decreasing Cost strategy, with the Homogenous strategy trailing behind. These findings underscore the importance of considering both benefits and costs in decision-making processes, as strategies that incorporate both factors tend to yield superior outcomes compared to those that focus solely on either benefits or costs. Thus, prioritizing sustainability projects based on their anticipated benefits (savings) appears to be more effective than prioritizing based solely on costs.

Seventh, the effectiveness of strategies diverges more prominently as the initial funding level decreases, evident from the widening gaps between performance curves towards the lower end of the funding spectrum. This trend holds true across all three performance dimensions. At lower initial funding levels, any inefficiency in prioritization strategies are exacerbated, as they impose a more significant drag on future funding accumulation. Consequently, poor prioritization combined with limited starting funds leads to a "slow-programs-become-slower" phenomenon.

This divergence becomes particularly pronounced at very low initial funding levels, with the effectiveness gap between strategies widening considerably. For instance, the disparity in schedule performance between the Decreasing B/C and Decreasing Savings strategies exceeds 40% at an initial funding level of 25% of the total improvement costs. At a further reduced initial funding level of 15%, the effectiveness gap between these two strategies surpasses 100%.

IV. CONCLUSION

In summation, the study on evaluating planning strategies for prioritizing the most viable projects to maximize investment returns within sustainability improvement programs employing a revolving-fund model underscores the critical importance of meticulous project prioritization. The findings highlight the complexity inherent in project prioritization, necessitated by competing performance metrics and resource constraints. Through the utilization of system dynamics modeling, the research offers valuable insights into the impacts of various project sequencing strategies on program performance metrics, elucidating the effectiveness of different prioritization methodologies across diverse initial investment levels. Notably, the study

underscores the pivotal role of prioritizing projects based on decreasing benefit-to-cost ratio (B/C) as the most effective strategy for maximizing program returns. Moreover, the research underscores the significance of innovative financing mechanisms such as revolving funds in promoting energy conservation and sustainability, offering sustainable financing solutions to enable continuous improvement in building infrastructures. The study's comprehensive evaluation of project prioritization strategies and their implications for sustainability program outcomes provides valuable guidance for program managers and stakeholders, facilitating informed decision-making aimed at optimizing investment returns and advancing environmental sustainability goals in the built environment. Through a systematic approach to project prioritization, stakeholders can enhance the efficiency and effectiveness of sustainability programs, thereby contributing to a more sustainable future for generations to come.

V. REFERENCES

- [1] AASHE., 2016. Campus sustainability revolving loan funds database [online]. Available from: <http://www.aashe.org/resources/campus-sustainability-revolving-loan-funds/> [Accessed 29 January 2019].
- [2] DeCanio, S.J., 1998. The efficiency paradox: bureaucratic and organizational barriers to profitable energy-saving investments. *Energy policy*, 26 (5), 441-454.
- [3] DoE., 2018. Better buildings challenge [online]. Available from: <https://betterbuildingsinitiative.energy.gov/challenge> [Accessed 29 January 2019].
- [4] Faghihi, V., Hessami, A.R., and Ford, D.N., 2015. Sustainability improvement program design using energy efficiency and conservation. *Journal of cleaner production*, 107, 400-409.
- [5] Flood, R., and Jackson M.C., 1991. *Creative problem solving: total systems intervention*. Chichester, UK: Wiley.
- [6] Ford, D., and Sterman, J., 2003. The liar's club: concealing rework in concurrent development. *Concurrent engineering: research and applications*, 111 (3), 211-219.
- [7] Forrester, J.W., 1961. *Industrial dynamics*. Waltham, MA: Pegasus Communications.
- [8] Hiller, J., Mills, V., and Reyna, E., 2011. *Breaking down barriers to energy efficiency*. New York, NY: EDF Climate Corps.
- [9] Jackson, J., 2010. Promoting energy efficiency investments with risk management decision tools. *Energy policy*, 38 (8), 3865-3873.
- [10] Jones, M.C., 2003. *Systems thinking: creative holism for managers*. Chichester, UK: Wiley.
- [11] Kim, A., et al., 2012. *Designing perpetual sustainability improvement programs for built infrastructures*. St. Gallen, Switzerland: System Dynamics Society.
- [12] Lane, M.B., McDonald, G.T., and Morrison, T.H., 2004. Decentralisation and environmental management in Australia: a comment on the prescriptions of the Wentworth Group. *Australian Geographical Studies*, 42 (1), 103-115.
- [13] Like, R.V.D., 2009. *The paid-from-savings-guide to green existing buildings*. Washington, DC: U.S. Green Building Council, Inc.
- [14] Matthews, H.S., Hendrickson, C.T., and Weber, C.L., 2008. The importance of carbon footprint estimation boundaries. *Environmental science & technology*, 42 (16), 5839-5842.
- [15] Morrissey, J., and Horne, R.E., 2011. Life cycle cost implications of energy efficiency measures in new residential buildings. *Energy and buildings*, 43 (4), 915-924.
- [16] Morton, T., Narayan, V., and Ramnath, P., 1995. A tutorial on bottleneck dynamics: a heuristic scheduling methodology. *Production and operations management*, 4 (2), 94-107.
- [17] Panwalker, S.S., and Iskander, W., 1977. A survey of scheduling rules. *Operations research*, 25 (1), 45-61.
- [18] Park, C.S., 2013. *Fundamentals of engineering economics*. 3rd ed. London, UK: Pearson.
- [19] Siemens & TAMU., 2011. A detailed account of how one university is improving its energy efficiency and campus environment through effective management and performance contracting [online]. Available from: <https://w3.usa.siemens.com/buildingtechnologies/us/en/consulting-engineer/engineeradvantage/Documents/texas-a-and-m-energy-improvements.pdf> [Accessed 29 January 2019].
- [20] Siemens Industry US., 2011. Answers for Texas A&M University [online]. Available from: http://www.youtube.com/watch?v¼4xla8Ix91_rk [Accessed 14 March 2012].
- [21] Sterman, J., 2000. *Business dynamics: systems thinking and modeling for a complex world*. Irwin, USA: McGraw-Hill.
- [22] Syal, M., et al., 2013. Information framework for intelligent decision support system for home energy retrofits. *Journal of construction engineering and management*, 140 (1), 04013030-1-04013030-15. TAMU Office of Sustainability., 2018.
- [23] U.S. Energy Information Administration., 2016. Energy consumption by sector [online]. Available from: http://www.eia.gov/totalenergy/data/monthly/pdf/sec2_3.pdf [Accessed 29 January 2019].
- [24] U.S. Environmental Protection Agency., 2016a. U.S. Greenhouse gas inventory report: 1990-2014 [online]. Available from: <https://www.epa.gov/ghgemissions/usgreenhouse-gas-inventory-report-1990-2014> [Accessed 29 January 2019].
- [25] U.S. Environmental Protection Agency., 2016b. GHG equivalencies calculator - calculations and references [online]. Available from: <https://www.epa.gov/energy/ghg-equivalencies-calculator-calculations-and-references> [Accessed 29 January 2019].
- [26] Zietsman, J., et al., 2011. *A guidebook for sustainability performance measurement for transportation agencies*. Washington, DC: The National Academies Press.